


HOMELIFT TECHNICAL PROPERTIES

Description : HOMELIFT

Dimension (mm)	Width		Length		Width		Length		Width		Length	
	Width	Length	Width	Length	Width	Length	Width	Length	Width	Length		
Extrenal Size	1000	1200	1100	1300	1200	1400	1250	1450				
Cabin Size	750	750	850	850	950	950	1000	1000				
Door (mm)	750x2000		800x2000		900x2000		900x2000					
Capacity	300KG		350KG		400KG		400KG					
Door type	Manuel or Automatic Swing door											
Speed	0,15 m/s (According to client inquiry 0,30 m/s)											
Drive Type	: Hydraulic											
Valve Group	: Blain KV1S (GERMANY) Hand Pump *Manometer *KS Safety Valve *Manual Lowering Valve *Ball Valve											
Safety Device	: Pizzato IP67 Lock with coil											
Pump	: Settima Screw Pump (GERMANY)											
Power	: SB Plunger Motor (ITALY)											
Motor	: 1 Phase or 3 Phase											
Pit (Min.)	: 110 mm İf Possible											
Over Head Height	: 2340 mm											
Anauns Language	: English, Turkish, Arabic											
Platform Buttoms	: Direction (floor) buttons, Display, Emergency stop, Diaphone, Alarm, Vatman,fan (It moves as much as you can with the Totman Principle.)											
Push Buttoms	: Call Buttom, vatman											
Emergency	: UPS, Manuel and Automatic Saving System											
Max. Distance	: 18.000 mm											
Max. Stops	: 5 Stops											
Steel Structure	: Polyester Painted, Stainless Steel Cover or Laminated Glass											
Standard in	: EN 81-41 ISO 9386-2											

HOMELIFT PHOTOS

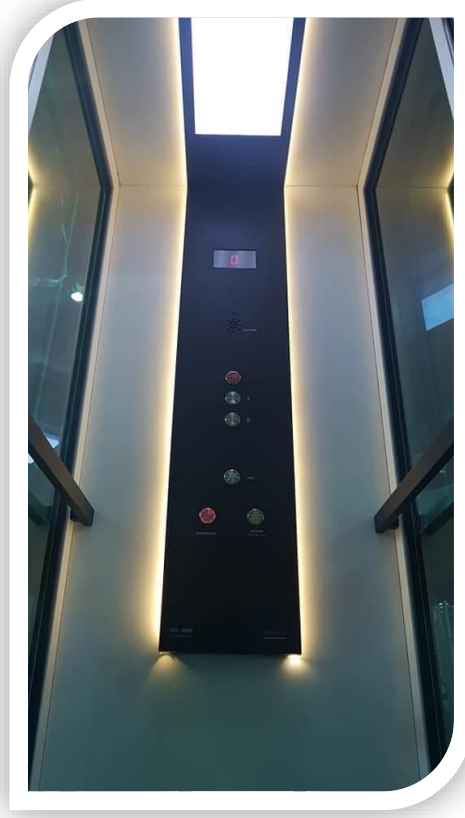

Mimarsinan OSB 23.Cd. No: 74 38165 Melikgazi / Kayseri /Turkey

Tel : +90 352 502 05 37 PBX

Gsm : +90 542 667 17 20 (Whatsapp)

Fax : +90 352 502 05 38

<http://www.devas.com.tr>

e-mail: export@devas.com.tr