
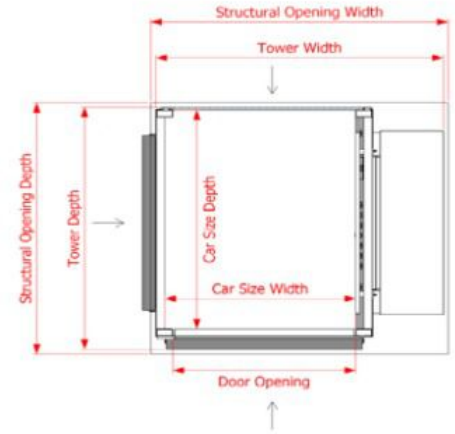
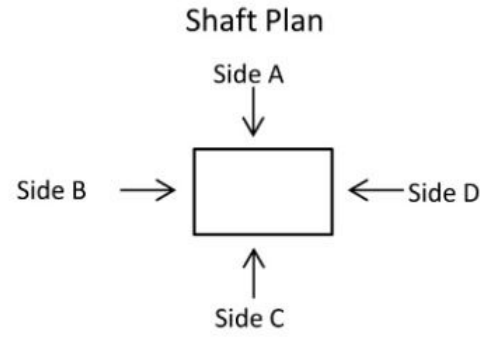
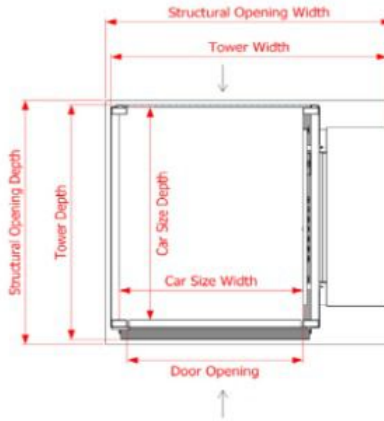
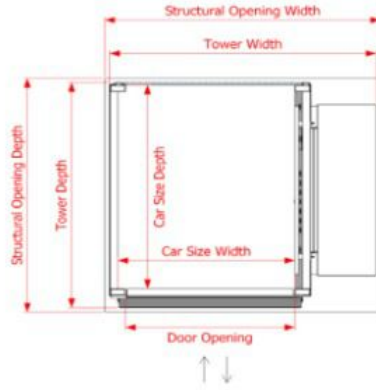


# Wheelchair and Platform Lifts

## Technical Specifications

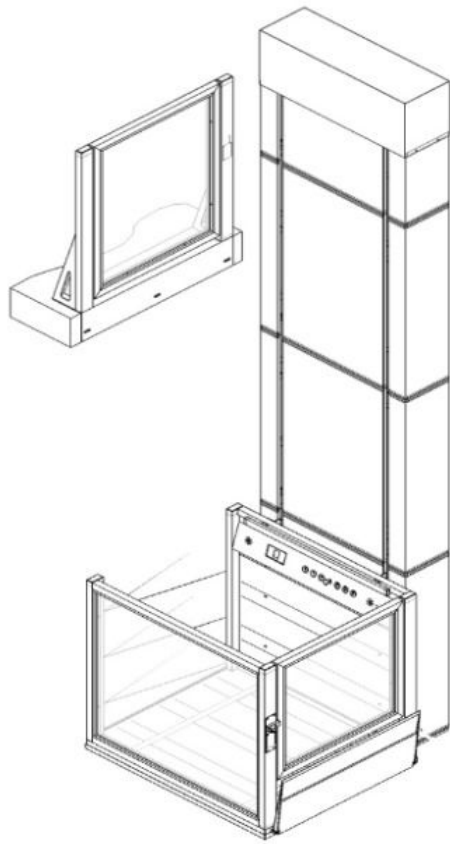

	For Seat Use		For Wheelchair Use		
MODEL	CORE 700	CORE 800	CORE 900	CORE 1000	CORE 1100
<b>SINGLE ENTRY</b>					
Structural Opening	1265mm X 1100mm	1365mm X 1200mm	1465mm X 1430mm	1565mm X 1430mm	1665mm X 1580mm
Tower Dimensions	1215mm X 1050mm	1315mm X 1150mm	1415mm X 1380mm	1515mm X 1380mm	1615mm X 1530mm
Platform Size	740mm X 920mm	840mm X 1020mm	940mm X 1250mm	1040mm X 1250mm	1140mm X 1400mm
Door Opening	700mm X 1100mm	800mm X 1100mm	900mm X 1100mm	1000mm X 1100mm	1100mm X 1100mm
<b>OPPOSING ENTRY</b>					
Structural Opening	1265mm X 1100mm	1365mm X 1200mm	1465mm X 1430mm	1565mm X 1430mm	1665mm X 1580mm
Tower Dimensions	1215mm X 1050mm	1315mm X 1150mm	1415mm X 1380mm	1515mm X 1380mm	1615mm X 1530mm
Platform Size	740mm X 920mm	840mm X 1020mm	940mm X 1250mm	1040mm X 1250mm	1140mm X 1400mm
Door Opening	700mm X 1100mm	800mm X 1100mm	900mm X 1100mm	1000mm X 1100mm	1100mm X 1100mm
<b>DIAGONAL ENTRY</b>					
Structural Opening	1340mm x 1100mm	1440mm X 1200mm	1540mm X 1430mm	1640mm X 1430mm	1740mm X 1580mm
Tower Dimensions	1290mm X 1050mm	1390mm X 1150mm	1490mm X 1380mm	1590mm X 1380mm	1690mm X 1530mm
Platform Size	740mm X 920mm	840mm X 1020mm	940mm X 1250mm	1040mm X 1250mm	1140mm X 1400mm
Door Opening	700mm X 1100mm	800mm X 1100mm	900mm X 1100mm	1000mm X 1100mm	1100mm X 1100mm

GENERAL DIMENSIONS					
Load Capacity	170 kg	215 kg	290 kg	325 kg	385 kg
Headroom	1500 mm	1500 mm	1500 mm	1500 mm	1500 mm
Pit Height	80 mm	80 mm	80 mm	80 mm	80 mm

- Car Type .....: Platform type, anti-corrosion static paint or stainless steel finish
- Car Door .....: anti-corrosion static paint or stainless steel
- Floor Door .....: anti-corrosion static paint or stainless steel
- Door Type..... : Automatic or manual type, swing door
- Lift Structure .....: anti-corrosion static paint or stainless steel, modular type
- Floor Control Pannel..... : Call and dispatch buttons + Emergency Stop with indicator display + vatman key
- Number of Stop .....: Max 3 stops, 3 meter
- Place of use .....: Indoor - outdoor
- Drive System .....: Screw Nut
- Motor Power .....: 1,1 - 2,2 kw VVVF

**Power Supply** : 3-phase 380-400 V 50 Hz  
1-phase 230 V 50 Hz  
**Speed** : 0,06 - 0,15 m/sec

**Technical Compliance**  
European Machinery Directive **2006/42/EC**  
European Standart **EN 81-41**

\* Has the right due to continuous product development some information or dimensions may change without notice.